



# AMERICAN TECHNOLOGIES NETWORK, CORP.


## OU-R3X

### REFLEX SIGHT / TACTICAL SCOPE

Everything and anything except the ordinary. The new OU-R3X is a revolutionary breakthrough.

This dual channel device combines a red dot reflex sight with a highly accurate 3x device. The reflex sight is perfect for the close quarter combat scenario with the 3x sight available for those longer shots. The OU-R3x is an advanced and extremely universal sight.

- A true innovation
- Unique dual channel device
- Channel 1: Reflex sight
- Channel 2: 3x tactical sight
- LIT with brightness adjustment
- 3X magnification, F:1.4, f26 mm lens (Channel 2)
- Multi coated Optics
- Prosheild and Everlight Lens coatings
- Easy to mount, equipped to fit Weaver bases picatinny rail
- Lifetime warranty

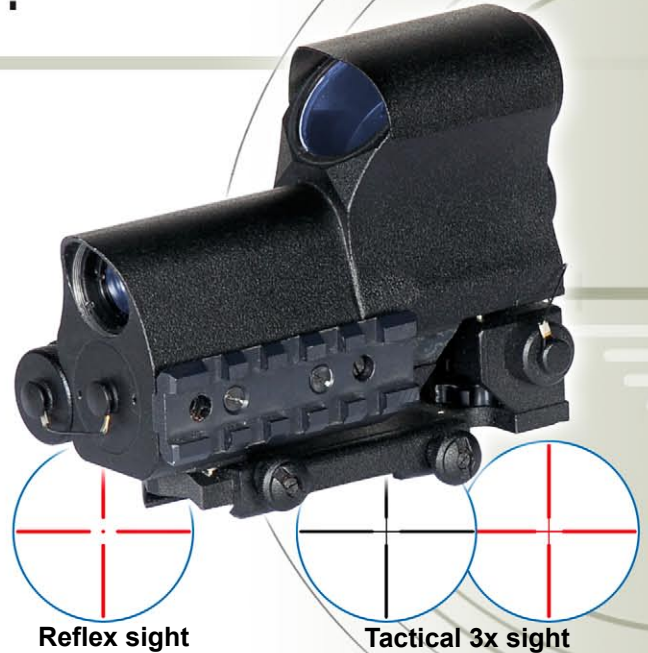

|                                      | TELESCOPE          | COLLIMATING            |
|--------------------------------------|--------------------|------------------------|
| <b>MAGNIFICATION</b>                 | 3                  | 1                      |
| <b>ENTER PUPIL DIAMETER</b>          | 15 mm              | 20 mm                  |
| <b>EXIT PUPIL DIAMETER</b>           | 5 mm               | 16 mm                  |
| <b>EYE RELIEF</b>                    | 68 mm              | ≥100 mm                |
| <b>FIELD OF VIEW</b>                 | 5°                 | 12° (eye relief 100mm) |
| <b>RESOLUTION</b>                    | 13.5 sec. of angle | -                      |
| <b>PARALLAX AT THE DISTANCE 100M</b> | 30 sec. of angle   | 30 sec. of angle       |
| <b>RETICULE ADJUSTMENT WAY</b>       |                    | ±1 deg. of angle       |
| <b>RETICULE ADJUSTMENT STEP SIZE</b> |                    | 1 min of angle         |
| <b>RETICULE</b>                      | DUPLEX             | Cross hair with dot    |
| <b>BATTERY</b>                       |                    | 3V, CR123              |
| <b>BATTERY LIFE</b>                  |                    | 300 hours              |
| <b>OPERATING TEMPERATURE RANGE</b>   |                    | -40°C...+50°C          |
| <b>WATERPROOF</b>                    |                    | 20 m FOR 1 hour        |
| <b>DIMENSIONS</b>                    |                    | 120x62x94 mm           |
| <b>WEIGHT</b>                        |                    | 550 g                  |

Export Warning: These products are subject to one or more of the export control laws and regulations of the U.S. Government. Pending the model these products are under the control jurisdiction of either the US Department of State or the US Bureau of Industry and Security US Department of Commerce. Export without proper licensing or consent is strictly prohibited.

